

Installation Requirements for Residential Generators

Documentation needed for application:


1. A site plan, showing the location of the generator on the lot, and its distance to:
 - Combustible material such as structures and vegetation
 - Openings into the home including doors, operable windows and vents
 - Other equipment such as air conditioners, heat pumps and gas meters
 - Property lines, sidewalks and streets
2. Indicate the type of fuel to be supplied and the location of any gas lines or tanks.
3. Specify the type of base that will be provided and how the unit will be anchored.

Other considerations:

1. Home owner's association approval may be required. In some areas the decibel rating of the generator may be limited by covenants or by the land use codes.
2. An electrical permit is also required from WA State Labor and Industries.
3. The generator must be approved by the manufacturer for its intended application and use and installed according to the installation instructions.

If the manufacturer's installation instructions do not specify clearances to combustible materials the required clearance must be 5 feet.

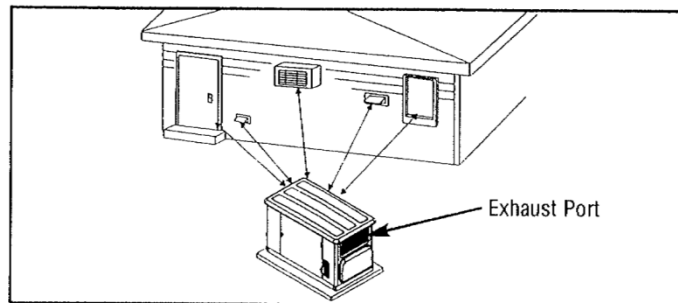

If the manufacturer's installation instructions do not specify clearances to openings into the house the required clearance must be 5 feet from the opening to the generator exhaust port.



Inspection:

When requesting inspection of the completed installation, please provide:

1. The manufacturer's installation manual.
2. A minimum 3 PSI pressure test on gas piping for a minimum of 10 minutes. Trenches containing gas piping must be kept open for inspection.
3. A listed gas connector and shut off valve for the specific application.

 WARNING	
	Running engine gives off carbon monoxide, an odorless, colorless, poison gas. Breathing carbon monoxide can cause headache, fatigue, dizziness, vomiting, confusion, seizures, nausea, fainting or death.

- Operate generator ONLY outdoors
- Install a battery operated carbon monoxide alarm near the bedrooms
- Keep exhaust gas from entering the confined area through windows, doors, ventilations intakes, or other openings